

HOFFMAN

FX SERIES

MANUAL PRESS



Engineered for durability, the FX Series features high-strength cast structures that deliver superior rigidity, vibration damping, and smooth operation—reducing fatigue, maintenance, and long-term operating costs.

ENHANCED PERFORMANCE

Adjustable pressure and manually activated steam valves provide operators full control for superior results and ease.

PREMIUM WOOD WORK SURFACE

Provides natural cushioning and a slightly resilient, garment-friendly surface for comfortable garment handling and positioning.

THERMAL INSULATION & ANTI-BURN DESIGN

The insulated metal cover prevents burns, reduces heat loss, and improves energy efficiency.

BUILT FOR A LONG LIFE


Including robust heads, frames, linkages, shock absorbers, and superior rust protection.

EFFORTLESS OPERATION & MAINTENANCE

Touch-control operation, no external air or power needed, with self-lubricating design for easy installation and maintenance.

MULTIPLE HEAD/BUCK OPTIONS

Available to suit your application.

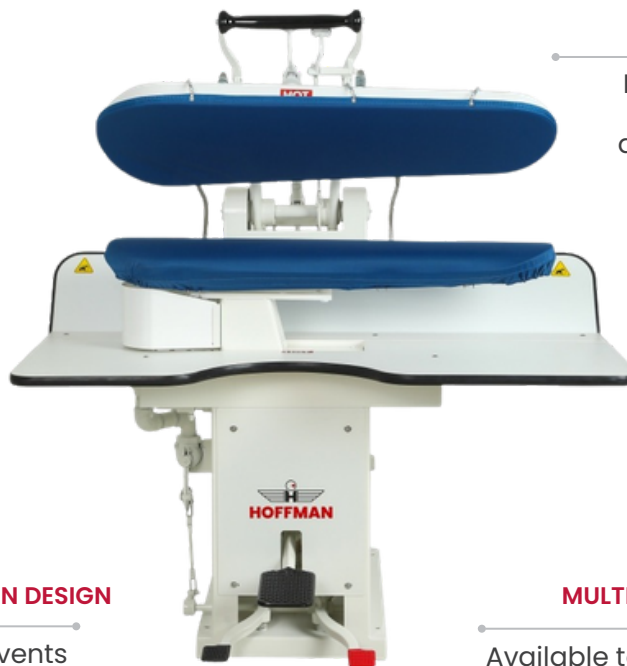

AVAILABLE OPTIONS

- Built-in electric steam generator (-SC)
- Built-in buck vacuum motor (1.1kW, 220V/50-60Hz/1)
- Steam gun (220V/50-60Hz/1)
- Swing-away sleeve arm
- Swing-away sleeve arm w/ vacuum
- Water spray gun w/ condenser
- Steam vacuum valve
- Electric heated steam iron w/ steam regulator and iron stand (0.8kW, 220V/50-60Hz/1)
- All steam iron and iron stand
- Stainless steel table
- Left hand head and buck mounting (on select models)
- Cast aluminum head w/spray



Equipment is subject to manufacturer's standard warranty. Accuracy of illustration and description of equipment shown herein applies to product as manufactured at time of publication.

© 2026 UnityLab Corp. All Rights Reserved. HOFFMAN® is a registered trademark of UnityLab Corp.

Rev. 09/2026

SPECIFICATIONS

	Unit	Dry Cleaning					Laundry			
		FX42	FX45	FX46(L8S)	FX48(L4)	FX42HH	FXLU42	FXLU45	FXLU51	FXLU53
Vacuum Connection Size (NPT)	in	1.25	1.25	2	2	1.25	N/A	N/A	N/A	N/A
Steam Inlet (NPT)	in	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
Steam Outlet (NPT)	in	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
Steam Working Pressure	psi (MPa)	85 (0.59)	85 (0.59)	85 (0.59)	85 (0.59)	85 (0.59)	85 (0.59)	85 (0.59)	85 (0.59)	85 (0.59)
Steam Consumption	lb/hr (kg/hr)	30 (13.6)	30 (13.6)	30 (13.6)	30 (13.6)	30 (13.6)	30 (13.6)	30 (13.6)	30 (13.6)	30 (13.6)
Table Length	in (mm)	56 (1422)	56 (1422)	56 (1422)	56 (1422)	56 (1422)	56 (1422)	56 (1422)	56 (1422)	56 (1422)
Dimensions (Width, Depth, Height)										
Uncrated	in (mm)	56 x 48 x 63 (1422 x 1219 x 1600)								
Crated	in (mm)	59 x 51 x 60 (1500 x 1300 x 1420)								
Approximate Weight										
Uncrated	lb (kg)	639 (290)	653 (296)	672 (305)	683 (310)	628 (285)	551 (250)	595 (270)	639 (290)	661 (300)
Crated	lb (kg)	728 (330)	741 (336)	761 (345)	772 (350)	717 (325)	639 (290)	683 (310)	728 (330)	750 (340)

DRY CLEANING



FX42



FX45



FX46(L8S)



FX48(L4)



FX42HH

LAUNDRY



FXLU42



FXLU45




FXLU51




FXLU53


BUCK DIMENSIONS (BEFORE PADDING)

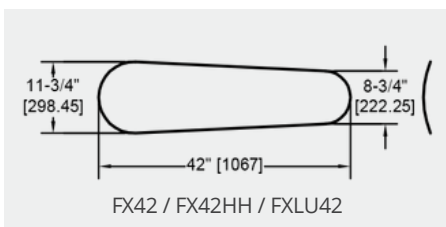


FX42 / FX42HH / FXLU42

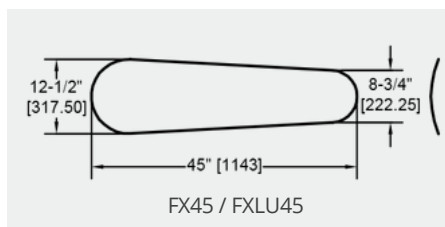


FX45 / FXLU45

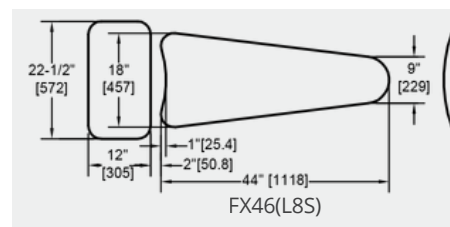


FX46(L8S)

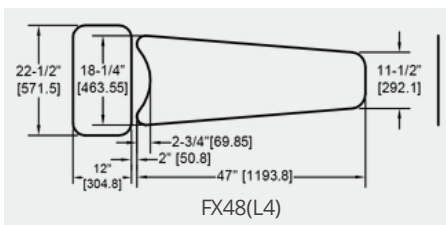

FX48(L4)

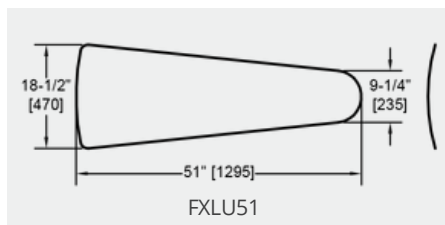

FXLU51

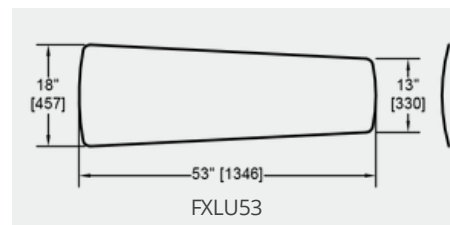

FXLU53