

HOFFMAN

BC SERIES

LAUNDRY
AIR-OPERATED PRESS



The BC Series delivers top-notch pressing at a reasonable cost. With its compact footprint and rapid single-cylinder operation, it facilitates speedy and convenient garment pressing even in tight spaces. Encounter the peace of mind and comfort ensured by our simplified pneumatic control system and ergonomic design.

EXCEPTIONALLY FAST, HIGH-QUALITY PRESSING


With meticulously crafted cylinder.

BUILT FOR A LONG LIFE

Including robust heads, frames, linkages, shock absorbers, and superior rust protection.

MINIMAL FLOOR SPACE REQUIRED

With a compact frame.

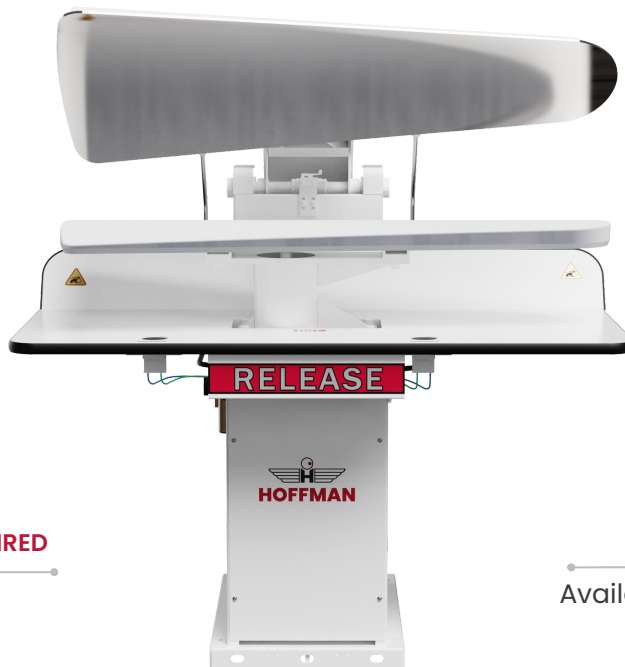

EASY INSTALLATION AND MAINTENANCE

Powered by simplified pneumatic control system.

OPERATOR'S COMFORT

Guaranteed by ergonomic soft touch operating buttons and foot pedal.

MULTIPLE HEAD/BUCK OPTIONS


Available to suit your application.

AVAILABLE OPTIONS


- Steam spotting gun (230V/50-60Hz/1)
- Steam/air spotting gun (230V/50-60Hz/1)
- Swing-away sleeve arm
- Water spray gun w/ condenser
- Electric heated steam iron w/ steam regulator and iron stand (1.1kW, 220V/50-60Hz/1)
- All steam Iron with iron stand
- Stainless steel table
- Adjustable head-release timer (0.11kW, 220V/50-60Hz/1)
- Safety rail
- Built-in vacuum (collar & cuff only)

SPECIFICATIONS

	Unit	BCLU51	BCLU53	BCLM1	BCLM3	BCLT12	BCL14	BCALB6	BCLC8	BCLC8S	BCLCY8	BCLCY8S
Steam Inlet (NPT)	in (mm)	1/2 (12.7)	1/2 (12.7)	1/2 (12.7)	1/2 (12.7)	1/2 (12.7)	1/2 (12.7)	1/2 (12.7)	1/2 (12.7)	1/2 (12.7)	1/2 (12.7)	1/2 (12.7)
Steam Outlet (NPT)	in (mm)	1/2 (12.7)	1/2 (12.7)	1/2 (12.7)	1/2 (12.7)	1/2 (12.7)	1/2 (12.7)	1/2 (12.7)	1/2 (12.7)	1/2 (12.7)	1/2 (12.7)	1/2 (12.7)
Steam Working Pressure	psi (MPa)	85 (0.59)	85 (0.59)	85 (0.59)	85 (0.59)	85 (0.59)	85 (0.59)	85 (0.59)	85 (0.59)	85 (0.59)	85 (0.59)	85 (0.59)
Steam Consumption	lb/hr (kg/hr)	41.9 (19)	41.9 (19)	34 (15.4)	34 (15.4)	40 (18.1)	40 (18.1)	41.9 (19)	34 (15.4)	34 (15.4)	34 (15.4)	34 (15.4)
Air Inlet (NPT)	in (mm)	3/8 (9.5)	3/8 (9.5)	3/8 (9.5)	3/8 (9.5)	3/8 (9.5)	3/8 (9.5)	3/8 (9.5)	3/8 (9.5)	3/8 (9.5)	3/8 (9.5)	3/8 (9.5)
Air Working Pressure	psi (MPa)	80 (0.55)	80 (0.55)	80 (0.55)	80 (0.55)	80 (0.55)	80 (0.55)	80 (0.55)	80 (0.55)	80 (0.55)	80 (0.55)	80 (0.55)
Air Consumption	L/cycle	20	20	20	20	20	20	20	20	20	20	20
Table Length	in (mm)	56 (1422)	56 (1422)	36 (914)	36 (914)	42 (1067)	36 (914)	42 (1067)	48 (1219)	48 (1219)	48 (1219)	48 (1219)
Dimensions (Width, Depth, Height)												
Uncrated	in	56 x 39 x 65		36 x 39 x 60		42 x 39 x 63	36 x 39 x 63	48 x 39 x 60				
	mm	1422 x 990 x 1640		914 x 990 x 1520		1067 x 990 x 1600	914 x 990 x 1600	1219 x 990 x 1520				
Crated	in	59 x 43 x 56		39 x 43 x 56		45 x 43 x 56	39 x 43 x 56	51 x 43 x 56				
	mm	1500 x 1100 x 1421		1000 x 1100 x 1421		1150 x 1100 x 1421	1000 x 1100 x 1421	1300 x 1100 x 1421				
Approximate Weight												
Uncrated	lb (kg)	650 (295)	672 (305)	386 (175)	386 (175)	481 (218)	459 (208)	617 (280)	551 (250)	551 (250)	595 (270)	595 (270)
Crated	lb (kg)	739 (335)	761 (345)	529 (205)	529 (205)	540 (245)	584 (240)	706 (320)	617 (280)	617 (280)	661 (300)	661 (300)

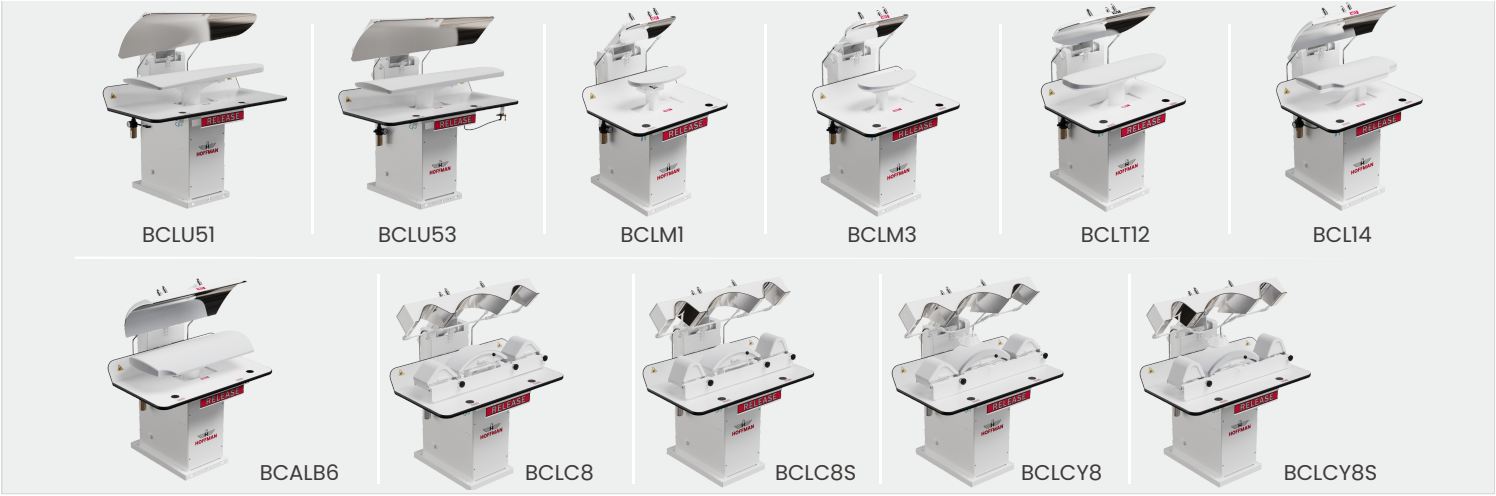

BUCK DIMENSIONS (BEFORE PADDING)

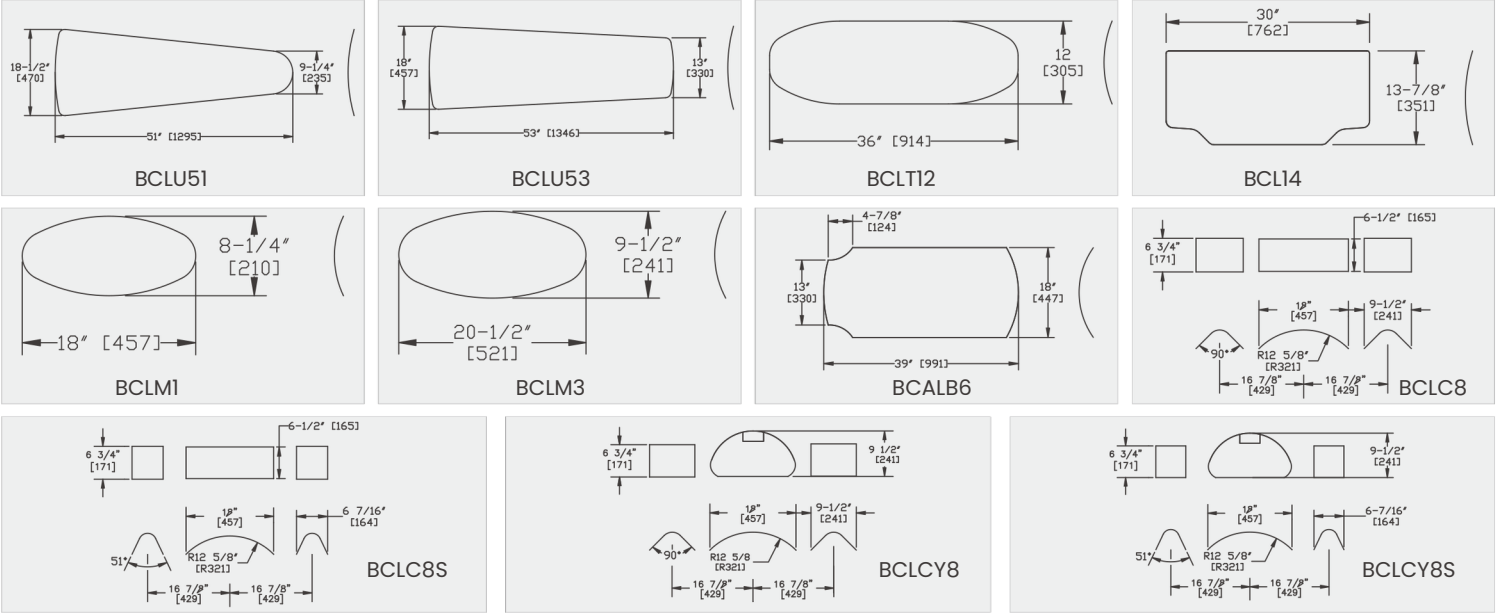

Equipment is subject to manufacturer's standard warranty. Accuracy of illustration and description of equipment shown herein applies to product as manufactured at time of publication.